

SONY



HXR-NX100

Large 1.0-inch Type CMOS Compact Solid-State Memory Camcorder


This compact handheld HXR-NX100 NXCAM® professional camcorder combines high sensitivity, enhanced resolution and accurate color reproduction, making it ideal for web content creation, student filmmaking, documentary and event video production.

Large 1.0-inch Type Exmor R® CMOS Sensor for stunning picture quality

Sony's unique 1.0-inch type Exmor R back-illuminated CMOS sensor which is approximately the same size as a Super 16mm film frame, delivers high resolution and fantastic low light performance, as well as offering more depth of field control as demanded by today's diverse shooting requirements. High sensitivity and fantastic resolution with 20 mega pixels*1 delivers striking detail and color, with minimum illumination 1.7 lux*2.

*1 14.2 million effective pixels *2 1/30 second shutter speed, Iris and gain Auto.

1.0-inch type Sensor



13.2 mm x 8.8 mm

1/2.3-inch type Sensor



5.9 mm x 4.4 mm

1/3-inch type Sensor



4.8 mm x 3.6 mm

Maximum 48x zoom for wide range shooting

Sony's G lens offers a 12x Optical Zoom from 29mm angle of view at wide end, which can be increased to 24x with Clear Image Zoom while retaining full resolution thanks to By Pixel Super Resolution Technology. Zoom performance can be doubled at any point with a Digital Extender up to 48x.

Three independent manual lens rings, built-in 4-step ND filter and other professional functions

3 manual lens rings ensure intuitive control of zoom, focus and iris. The HXR-NX100 is equipped with 4 step conventional mechanical ND filter positions (Clear, 1/4ND, 1/16ND and 1/64ND) for better exposure and depth of field control in bright scene, 0.24 type 1550K dots EVF and 3.5 type 1550K dots LCD for easy monitoring.

Dual media slots for recording flexibility

Two memory card slots enable various recording options such as backup, simultaneous, relay and independent recording.


"SIMUL" mode permits simultaneous recording to two memory cards, while "RELAY" mode automatically switches recording from the first to the second memory card when the first is full. The user can also use buttons on the camcorder to independently start and stop recording on different memory cards.

Wide choice of connections

The HXR-NX100 provides a wide variety of connectivity options including HDMI, Multi/Micro USB, XLR terminals, REMOTE, Composite (BNC) and Multi Interface (MI) Shoe, which allows for a wide range of accessories without the need for cables, such as the HVL-LBPC Video Light and the UWP-D wireless microphone series.

Breadth of recording format capabilities

The HXR-NX100 provides multiple choices including AVCHD® and DV® which are suitable for conventional workflow, and newly implemented XAVC™ S 50Mbps, which delivers better image quality for professional requirements.

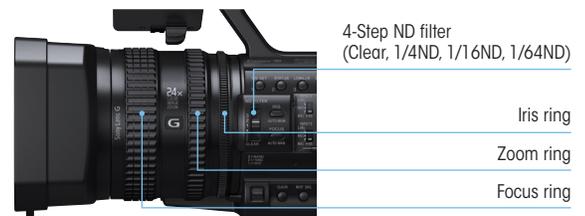

Specifications

HXR-NX100	
General	
Weight	Approx. 3 lb 15 oz (1790 g) (body) Approx. 4 lb 10 oz (2100 g) (with lens hood, eyecup, NP-F770 battery)
Dimensions (W x H x D)**	6 3/4 x 7 3/8 x 14 5/8 inches (171.3 x 187.8 x 371.3 mm) (With the accessories (lens hood, large eyecup), excluding the grip belt and including the projecting parts)
Power Requirements	DC In: 8.4 V Battery: 7.2 V
Power Consumption	Approx. 5.8 W (while recording with viewfinder and XAVC S HD 1080/60i 50 Mbps) Approx. 6.0 W (while recording with LCD and XAVC S HD 1080/60i 50 Mbps)
Operating Temperature	32°F to 104°F (0°C to 40°C)
Storage Temperature	-4°F to +140°F (-20°C to +60°C)
Battery Operating Time	Approx. 315 min. with NP-F770 battery (while recording with LCD, XAVC S 1080/60i, 50 Mbps) Approx. 525 min. with NP-F770 battery (while playing with LCD, XAVC S 1080/60i, 50 Mbps)
Recording Format (Video)	XAVC S HD: MPEG4-AVC/H264 4:2:0 Long profile AVCHD: MPEG-4 AVC/H.264 AVCHD 2.0 format compatible DV
Recording Format (Audio)	XAVC S HD: Linear PCM 2ch, 24-bit, 48 kHz AVCHD: Linear PCM 2ch, 16-bit, 48 kHz / Dolby Digital 2ch, 16-bit, 48 kHz DV: Linear PCM 2ch, 16-bit, 48 kHz
Recording Frame Rate	XAVC S (1920 x 1080)@59.94p, 29.97p, 23.98p, 50 Mbps AVCHD (1920 x 1080)@59.94p, PS mode (28 Mbps) AVCHD (1920 x 1080)@59.94i/29.97p/23.98p, FX mode (24 Mbps), FH mode (17 Mbps) AVCHD (1440 x 1080)@59.94i, HQ mode (9 Mbps), LP mode (5 Mbps) AVCHD (1280 x 720)@59.94p, FX mode (24 Mbps), FH mode (17 Mbps), HQ mode (9 Mbps) DV (720 x 480)@59.94i, 25 Mbps
Recording	XAVC S HD@LPCM 2ch 50 Mbps Approx. 155 min with 64 GB memory card *SDXC Memory Card is needed for recording XAVC-S AVCHD@LPCM 2ch PS Mode Approx. 290 min with 64 GB memory card Approx. 145 min with 32 GB memory card AVCHD@LPCM 2ch FX Mode Approx. 340 min with 64 GB memory card Approx. 170 min with 32 GB memory card AVCHD@LPCM 2ch FH Mode Approx. 450 min with 64 GB memory card Approx. 225 min with 32 GB memory card DV Approx. 280 min with 64 GB memory card Approx. 140 min with 32 GB memory card
Lens	
Lens Mount	Fixed
Zoom Ratio	12x (optical), servo
Focal Length	f = 9.3 - 111.6 mm equivalent to f = 29.0 - 348.0 mm on 35 mm lens (16:9) equivalent to f = 35.5 - 426.0 mm on 35 mm lens (4:3)
Iris	F2.8 - F4.5 auto/manual selectable
Focus	AF/MF selectable, 10 mm to ∞ (Wide), 1000 mm to ∞ (Tele)
Image Stabilizer	ON/OFF selectable, shift lens
Filter Diameter	M62 mm


HXR-NX100	
Camera Section	
Imaging Device (Type)	Large 1.0-inch type (13.2mm x 8.8 mm) back-illuminated Exmor R CMOS sensor
Effective Picture Elements	Approx. 14.2 M pixels (16:9)/Approx. 10.6 M pixels (4:3)
Built-in Optical Filters	OFF: Clear, 1: 1/4ND, 2: 1/16ND, 3: 1/64ND
Minimum Illumination	[60i] 1.7 lux (LOW LUX mode)
Shutter Speed	[60i]: 1/8 - 1/10,000 (1/6 - 1/10,000 when shooting with 24p)
Slow & Quick Motion Function	[60i]: 1080p: Frame rate selectable 1.2, 4.8, 15.30, 60 fps
White Balance	Preset (Indoor: 3200K, Outdoor: 5600K) 7 steps, Color temperature set range: 2300-15000K, OnePush A, B, Auto selectable
Gain	-3, 0, 3, 6, 9, 12, 15, 18, 21, 24, 27, 30, 33 dB, AGC
Gamma Curve	Selectable
Input/Output	
Audio Input	XLR-type 3-pin (female) (x2), line/mic/mic +48 V selectable
Video Output	BNC (x1), Composite 1.0Vp-p, 75 Ω
Audio Output	RCA pin
SDI Output	-
USB	Multi/Micro USB jack (x1)
Headphone Output	Stereo mini jack (x1)
Speaker Output	Monaural
DC Input	DC jack
Remote	Stereo mini mini jack (x1)
HDMI Output	Type A (x1)
Monitoring	
Viewfinder	0.6 cm (0.24 type), Approx. 1.56 M dots.
LCD	8.8 cm (3.5 type), Approx. 1.56 M dots.
Built-in Microphone	
Omni-directional stereo electret condenser microphone.	
Media	
Type	Memory Stick Pro Duo™ and SD/SDHC/SDXC compatible (x1), SD/SDHC/SDXC (x1) media
Wi-Fi/NFC	
Supported Format	-
Frequency Band	-
Security	-
NFC	-
Streaming	-
FTP	-
Supplied Accessories	
Charger (1), Lens hood (1), Lens cap (1), Large eyecup (1), Shoe cap (1), USB cable (1) Rechargeable battery pack (NP-F770) (1), AC Adaptor (AC-L100C) (1), Power cord (mains lead) (1) Wireless Remote Commander (RMT-845) (1), Lithium battery (CR2025 for the Wireless Remote Commander, pre-installed to the Wireless Remote Commander) (1), Operating Guide (2), CD-ROM (1), Warranty (1)	

*1 The values for dimensions are approximate.

Available Accessories

 2NP-F970/B Rechargeable Battery Pack	 ACC-L1BP AC Adaptor/Charger/Battery Kit	 HVL-LBPC LED Battery Video Light	 UWP-D11/UWP-D12 Wireless Microphone Package	 SMAD-P3 MI Shoe Mount Adaptor *required for cable-free operation with UWP-D11/UWP-D12	 ECM-VG1 Electret Condenser Microphone	 ECM-MS2 Electret Condenser Microphone
 VCL-HG0872K Wide Conversion Lens	 SF-128UX2 (128 GB, 64 GB) SDXC Memory Card	 SF-32UX (32 GB, 16 GB, 8 GB) SD/SDHC Memory Card	 MS-HX32B (32 GB, 16 GB, 8 GB) Memory Stick PRO-HG Duo™ Media	 RM-1BP Remote Commander		

Dimensions

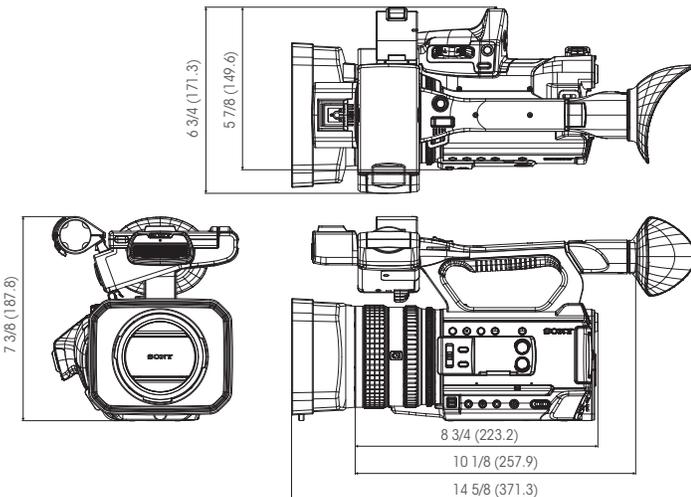

Unit: inches (mm)

©2015 Sony Electronics Inc. All rights reserved.
Reproduction in whole or in part without written permission is prohibited.
Features and specifications are subject to change without notice.
Weights and measurements are approximate.

Sony, XAVC, Memory Stick PRO-HG Duo, NXCAM, DV, Exmor R and the Sony logo are trademarks of Sony.
AVCHD and AVCHD logo are trademarks of Panasonic Corporation.
All other trademarks are the property of their respective owners.

Sony Electronics Inc.
1 Sony Drive
Park Ridge, NJ 07656
sony.com/nxcam

V-2624-A (MK20009V1)

Printed in USA (8/15)